

MAXPOWER
SOLAR ENERGY

SUNTRONIC PV 10000 ULTRA

SINGLE PHASE HYBRID INVERTER



BUILT-IN WIFI

Built-in WiFi with remote monitoring APP



WARRANTY

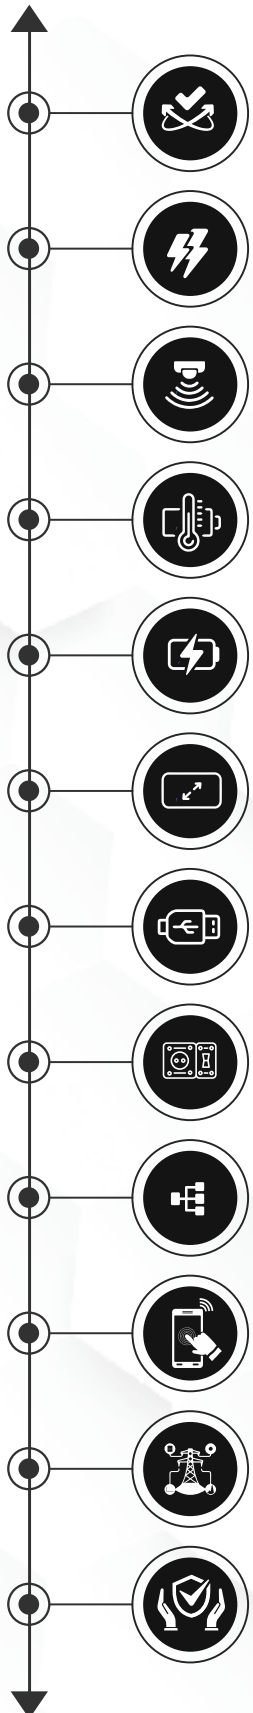
18 Months Warranty



DUAL OUTPUT

Dual output for smart load management

PV 10000 ULTRA FEATURES

- 
- Dual outputs for smart load management
 - Two independent AC power sources connected and switched automatically
 - Built-in current transformer sensor to meet self-consumption application
 - Support external BTS (Battery Temperature Sensor) detection
 - Built-in power status lighting indicators
 - Built-in 2.8" colored LCD with slide operation
 - Supports USB On-the-Go function reserved communication port for BMS (RS485, CAN-BUS or RS232)
 - Support optional GFCI, Rapid shutdown, AFCI detections
 - Parallel operation with 6 units
 - Built-in WiFi with remote monitoring APP
 - Grid Feeding
 - 18 Months Warranty

DATASHEET

MODEL	SUNTRONIC PV 10000 ULTRA
RATED POWER	8000VA/8000W
PARALLEL CAPABILITY	YES, 6 units
INPUT	
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	230VAC $\pm$ 5%
Surge Power	16000VA
Efficiency (Peak)	93%
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)
Waveform	Pure sine wave
BATTERY	
Battery Voltage	48 VDC
Floating Charge Voltage	54 VDC
Overcharge Protection	63 VDC
SOLAR CHARGER & AC CHARGER	
Solar Charger Type	MPPT
Maximum PV Array Power	10000W (5000W x 2)
MPPT Range @ Operating Voltage	90 ~ 450 VDC
Maximum PV Array Open Circuit Voltage	500 VDC
Maximum PV Input Current	27A x 2 (MAX 40A)
Maximum Solar Charge Current	150A
Maximum AC Charge Current	120A
Maximum Charge Current	150A
PHYSICAL	
Dimension, D x W x H (mm)	145 x 438 x 553.6
Net Weight (kgs)	18.4
Communication Interface	USB/RS232/RS485/WiFi/Dry-contact/BTS Support optional GFCI, Rapid shutdown, AFCI detection
External Current Sensor Port	Yes, built-in current transformer sensor
OPERATING ENVIRONMENT	
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C
STANDARD	
Compliance Safety	CE

Product specifications are subject to change without further notice.

